

NT-1220 Manual

1.Factory Default Setting (include below two steps)


Step 1



000B0

Factory Default


Step 2

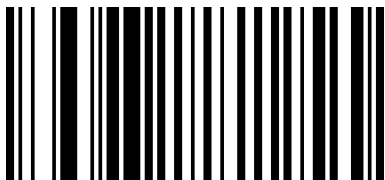

000602


USB Keyboard*

2. scanning Mode

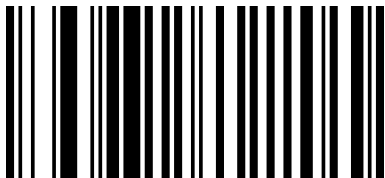

013300

By trigger

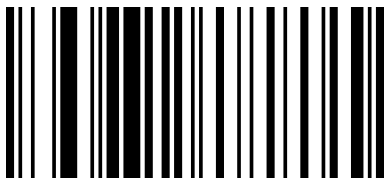


013304

Continuous Scanning


3. Keyboard Language Setting




0005000
USA Keyboard

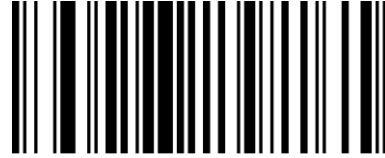

0005003
Spanish Keyboard

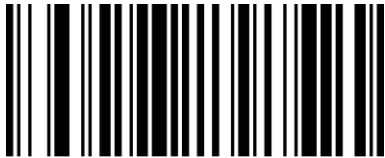

0005007
UK Keyboard

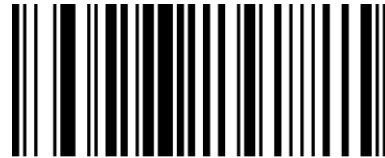

0005008
Italy Keyboard



0005010
Germany Keyboard



0005014
Portugal Keyboard



0005024
Russian Keyboard



0005009
French Keyboard


4. Terminator Setting



Add CR



Add LF

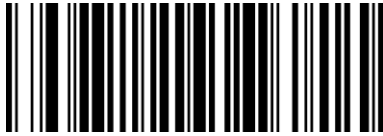


Add CR+LF



None


5. Common Function

EAN-8

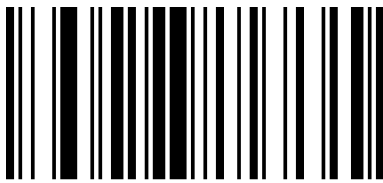

00371


Enable EAN-8*

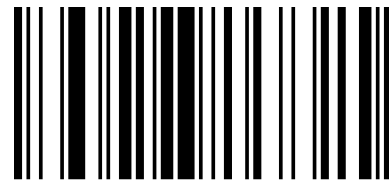

00370


Disable EAN-8

EAN-13

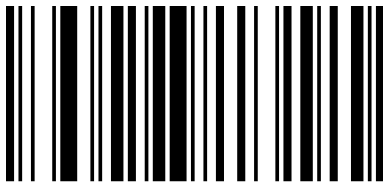

00361

Enable EAN-13*

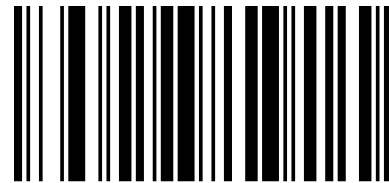

00360


Disable EAN-13

Add-On Code

And EAN-8/EAN-13 Barcode can be augmented with a two-digit or five-digit add-on code form a new one. In the example below, the part surrounded by blue line is an EAN-8 barcode while the part circled by red line is add-on code. The default mode opens “ Disable Add-on Code”. Users can take “Add-On Code Setting” for reference.




EAN-13 Transfer to ISBN

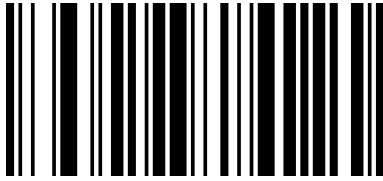

00481


Enable EAN-13 Transfer to ISBN

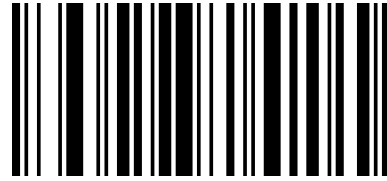

00480


Disable EAN-13 Transfer to ISBN*

Codabar

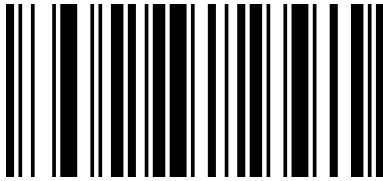

00851


Enable Codabar

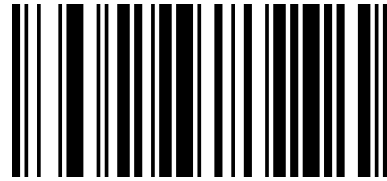

00850


Disable Codabar

Code 11

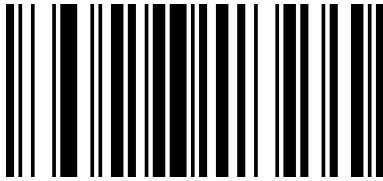

01261


Enable Code 11*

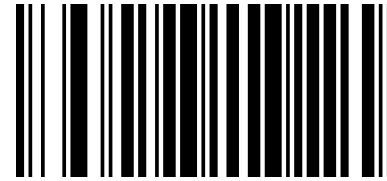

01260


Disable Code 11

Code 39

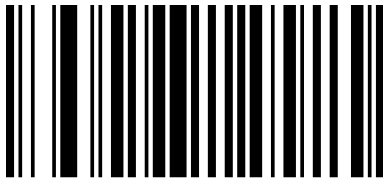

00221


Enable Code 39*

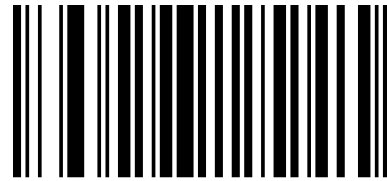

00220


Disable Code 39

Full ASCII

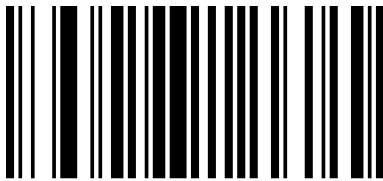

00231


Enable Full ASCII*

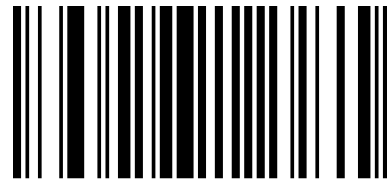

00230


Disable Full ASCII

Code 93

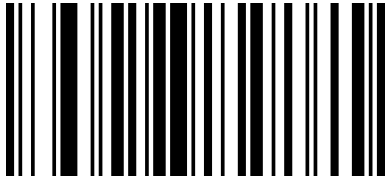

00621


Enable Code 93*

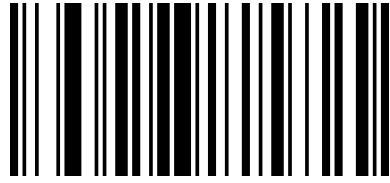

00620


Disable Code 93

Code128

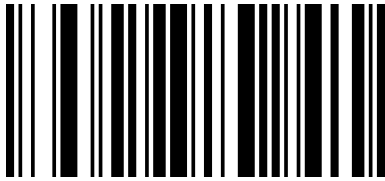

00691


Enable Code 128*

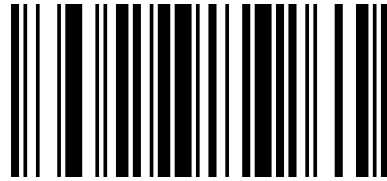

00690


Disable Code 128

GS1 DataBar Limited (RSS Limited)

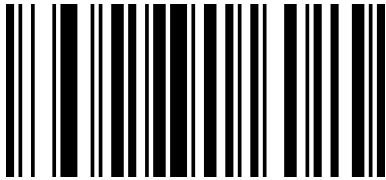

01771


Enable RSS Limited

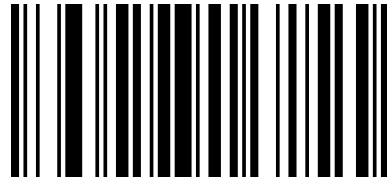

01770


Disable RSS Limited*

GS1 DataBar Ominidirectional (RSS Ominidirectional)

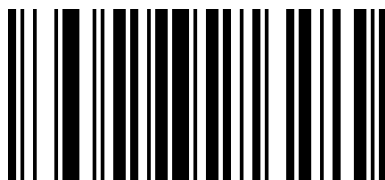

01671


Enable RSS Ominidirectional

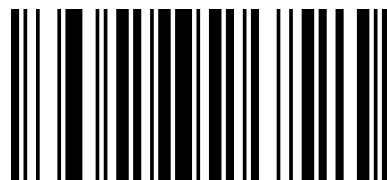

01670


Disable RSS Ominidirectional*

UPC-A

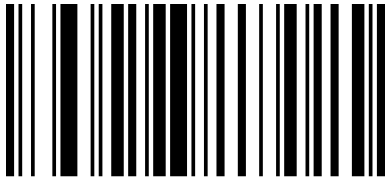

00341

Enable UPC-A *

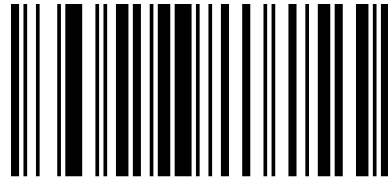

00340


Disable UPC-A

Add - On Code

A UPC-A barcode can be augmented with a two-digit or five-digit add-on code to form a new one. In the examples below, the part surrounded by blue line is a UPC-A barcode while the part circled by red line is add-on code. Users can take “Add-On Code” Setting for reference.




UPC-A Transfer to EAN-13

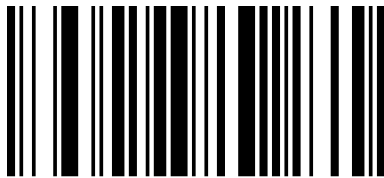

00391


Enable UPC-A Transfer to EAN-13

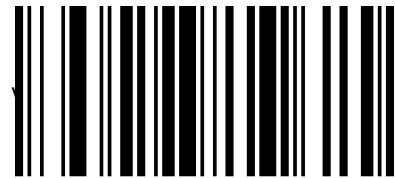

00390


Disable UPC-A Transfer to EAN-13

UPC-E

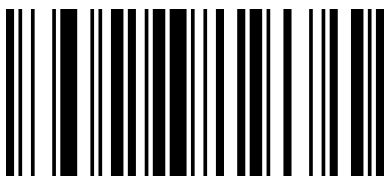

00351

Enable UPC-E

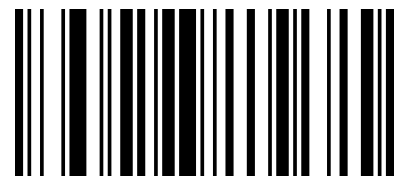

00350


Disable UPC-E

Add - On Code Setting

In the example below ,the part surrounded by blue line is a UPC-A barcode while the part circled by red line is add-on code. Users can take “Add-On Code Setting” for reference.




Transfer UPC-E to UPC-A

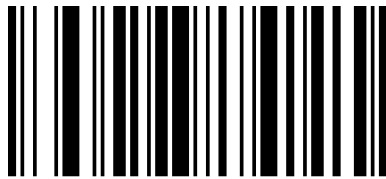

00381

Enable Transfer UPC-E to UPC-A

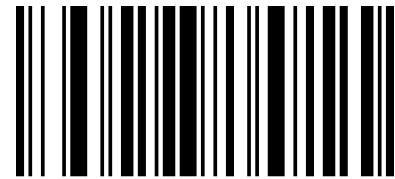

00380


Disable Transfer UPC-E to UPC-A

Interleaved 2 of 5



00961

Enable Interleaved 2 of 5*

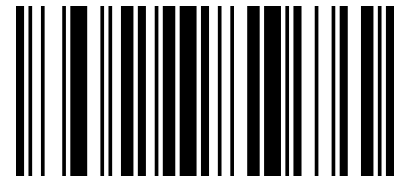

00960


Disable Interleaved 2 of 5

Industrial 2 of 5



01061


Enable Industrial 2 of 5*

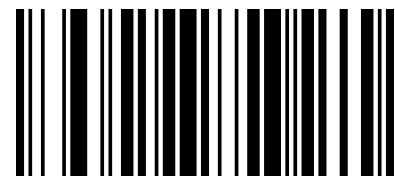

01060

Disable Industrial 2 of 5

Standard 2 of 5

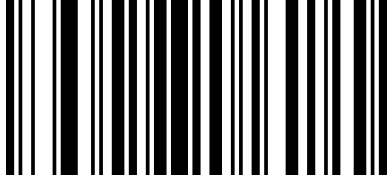

01871


Enable Standard 2 of 5



01870


Disable Standard 2 of 5

Matrix 2 of 5

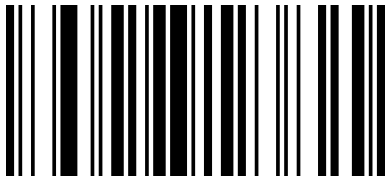

01461


Enable Matrix 2 of 5*

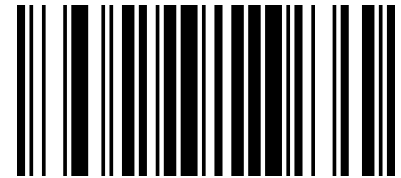

01460


Disable Matrix 2 of 5

MSI

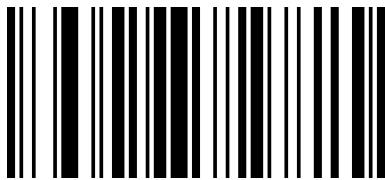

01151


Enable MSI

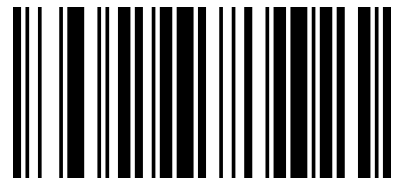

01150


Disable MSI*

Plessey

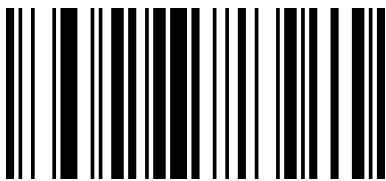

01161

Enable Plessey

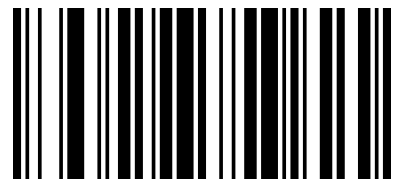


01160

Disable Plessey*


Add-On Code Setting

Users can scan the code below to open or close the setting of UPC/EAN/JAN.

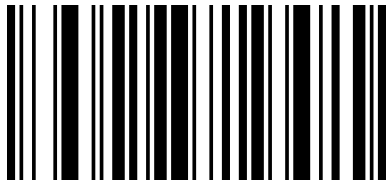


00551

Enable 2-Digit Add-On Code

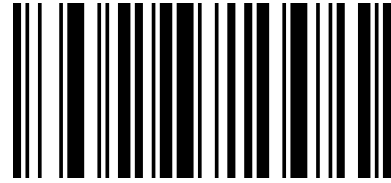


00552

Enable 5-Digit Add-On Code

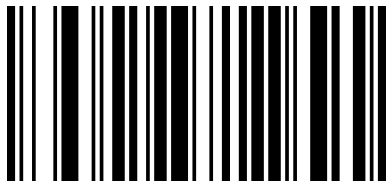

00553

Enable 2&5 Digit Add-On Code

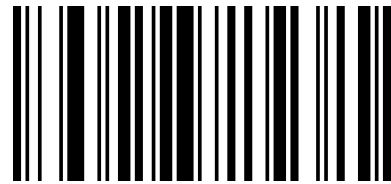

00550

Disable Digit Add-On Code*